



广州市番禺宝联实业有限公司

Bao-Lian Industry Co.,Ltd

规格书 Specification

品 名 Product: 绿三足长杆滑轮退币开关(弹片)

Green Three Terminal Claw Machine Crane Gantry
Switch (Long)

版 本 Revision: 1.1

呈 送 日 期 Issuing date: 2024.06.14



Address: 广州市番禺区市桥镇市新路 42 号 No.42 Shi Xin Road, Pan Yu District , Guangzhou City, GuangDong Province, China

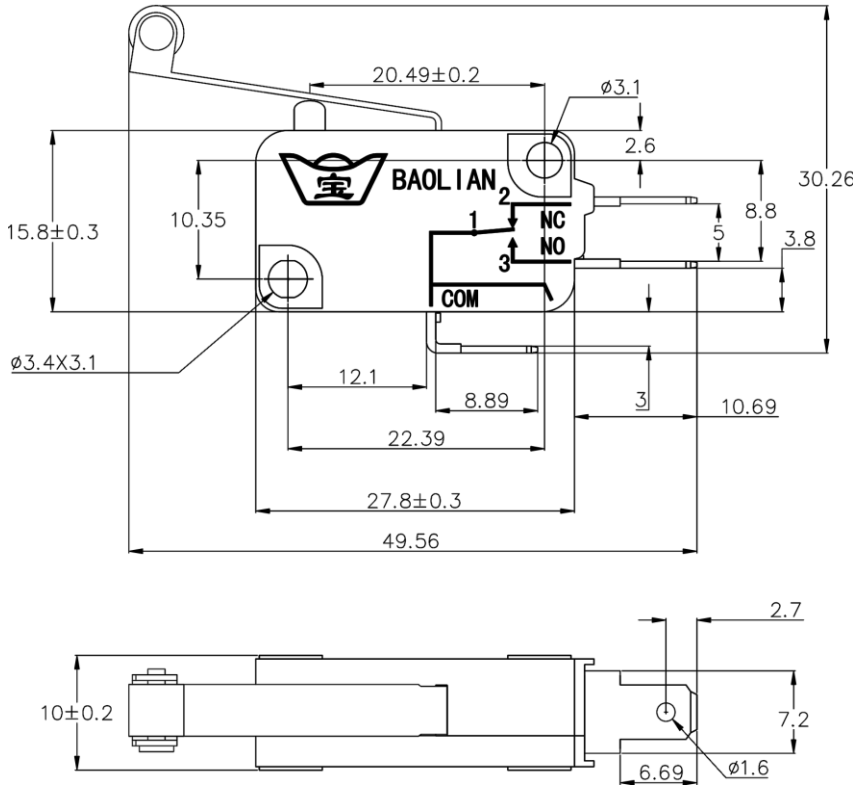
Tel: 020-84893809020-84893819

Fax: 020-84894187

E-mail:sales@bao-lian.com



Green Three Terminal Claw Machine Crane Gantry Switch (Long)

产品编码 Product ID	10307002	产品名称 Description	绿三足长杆滑轮退币开关(弹片) Green Three Terminal Claw Machine Crane Gantry Switch (Long)
外型尺寸 Size chart			
 The technical drawing shows two views of the switch. The top view is a plan view showing the main body with dimensions: 20.49±0.2, 15.8±0.3, 10.35, 2.6, 30.26, 8.8, 3.8, 5, 12.1, 8.89, 22.39, 27.8±0.3, 49.56, 10.69, 3, 2.7, 7.2, 6.69, and 10±0.2. The bottom view is a side view showing the switch mechanism with dimensions: 2.7, 7.2, 6.69, and 10±0.2. The main body is labeled 'BAOLIAN' and 'COM'. The switch mechanism is labeled 'NC' and 'NO'.			
接点规格 Contact specification			
接点类型 Type	铆圆点 Riveted dot	接点材质 Material	铜镶 0.3mm 厚银 Silver-plated copper
功能规格 Specification			
额定电压 Voltage rating	30VDC	额定电流 Current rating	0.25A
接触电阻 Contact resistance	≤100mΩ (初始值 Initial)	操作力度 Operating force	55±25gf
动作位置 Operating position	2.1±1mm	自由位置 Free position	25.6±2mm
行程 Stroke length	4.6±2mm	重量 Weight	7.4±0.5g
可靠度参数 Reliability parameters			
机械寿命 Mechanical life	5,000,000 Cycles	电气寿命 Electrical life	1,000,000 Cycles (测试条件 Test condition: 5V 1mA)
绝缘电阻 Insulation resistance	≥100MΩ (初始值在 DC500V 绝缘抵抗计算)	耐压强度 Dielectric strength	AC500V·50/60Hz·1min
适用温度 Operating temperature	-25~+85℃	适用湿度 Operating humidity	<85%RH